

**C70-00A-01****C70-00E-01****Quick Installation Guide****Master PoECam L2+ Managed Switch****INTRODUCTION**

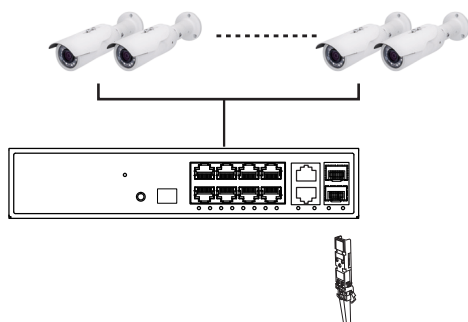
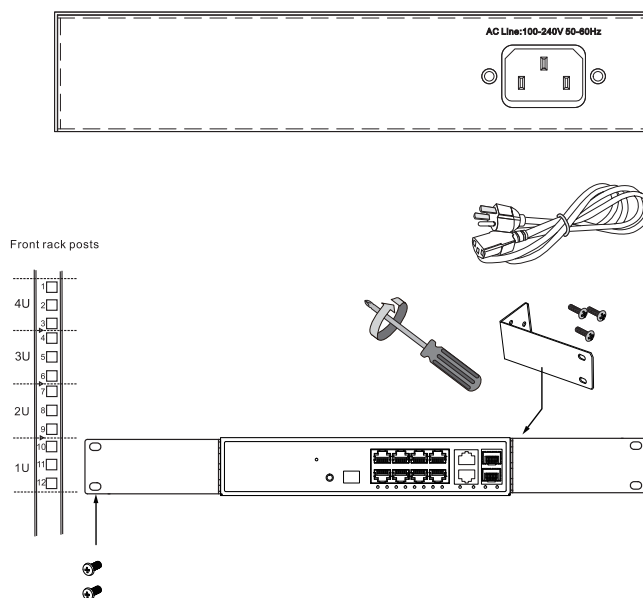
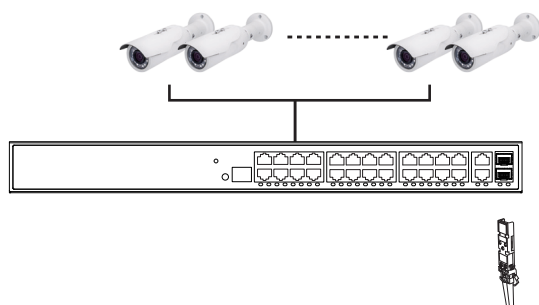
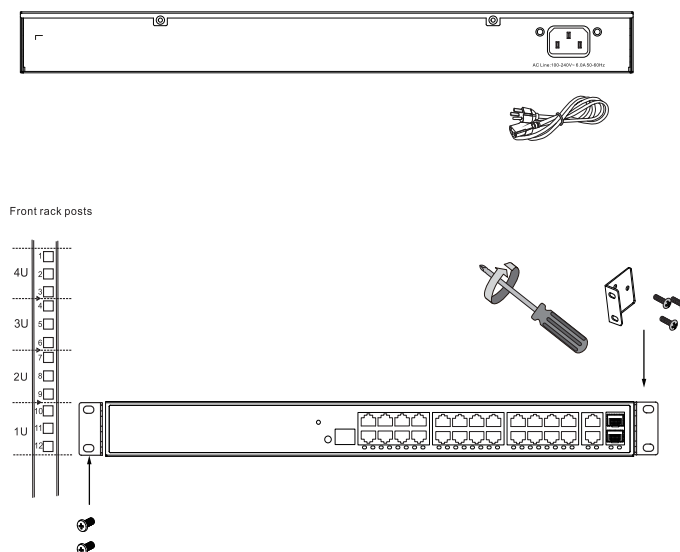
The C70-00A-01/C70-00E-01 is a 10/26 port 10/100/1000BaseT managed switch. It provides a reliable infrastructure for your business network and deliver intelligent features. Moreover, this switch also comes with the functionality specifically designed for managing IP cameras and for a quick access to connected devices.

PACKAGE CONTENTS

* 1x Switch	* 1x Quick Installation Guide
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)

⚠ IMPORTANT:

1. Install the Switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables.
4. AC input (100~240V/AC, 50~60Hz), for a max. consumption of 30W / 65W.

C70-00A-01 CONNECTION**Front Panel****Rear Panel****C70-00E-01 CONNECTION****Front Panel****Rear Panel**

DEFAULTS

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
User name	admin
Password	admin

LED DEFINITIONS

System	Green ON	Lit when power is on and normal. Off when power is disconnected.
Below are the LEDs below the Ethernet and SFP ports:		
Ethernet port LED	Green/Yellow	Green when TP link is on 1000Mbps Yellow when TP link is on 10/100Mbps
SFP speed	Green/Yellow	Green when SFP link is on 1Gbps Yellow when SFP link is on 100Mbps

RESET & RESTORE

Reset the switch	2 ~ 7 seconds	Blinking Green	All LEDs off
Restore to defaults	7 ~ 12 seconds	Blinking Green	All LEDs ON

All specifications are subject to change without notice.
Copyright © 2017 AETEK INC. All rights reserved.