

Model	Description
H40-022-90-120	2xGbE 95W PoH PoE + 2xGbE SFP
H40-022-91-120	2xGbE 90W bt PoE + 2xGbE SFP
H40-022-90-120-A	2xGbE 95W PoH PoE + 2xGbE SFP

Model	Description
H40-022-91-120-A	2xGbE 90W bt PoE + 2xGbE SFP
H40-022-91-120-V2	2xGbE 90W bt PoE + 2xGbE SFP
H40-022-91-120-A-V2	2xGbE 90W bt PoE + 2xGbE SFP


### PACKAGE CONTENTS

* 1x PoE switch	* 1x Quick Installation Guide	* 1x breaker screw kit, 1xM25 2 hole(-A only)
* 1x T25 L-wrench	* 1x Corrugated Tubing , 1x M25 screw plug, 1xM25 5 hole.	

### ⚠ IMPORTANT:


1. Install the PoE switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables.
4. AC input (100~240V/AC, 50~60HZ)
5. IP67 rated housing
6. Although housing is IP67 rating , this is not suitable for water jets.

### CONNECTION

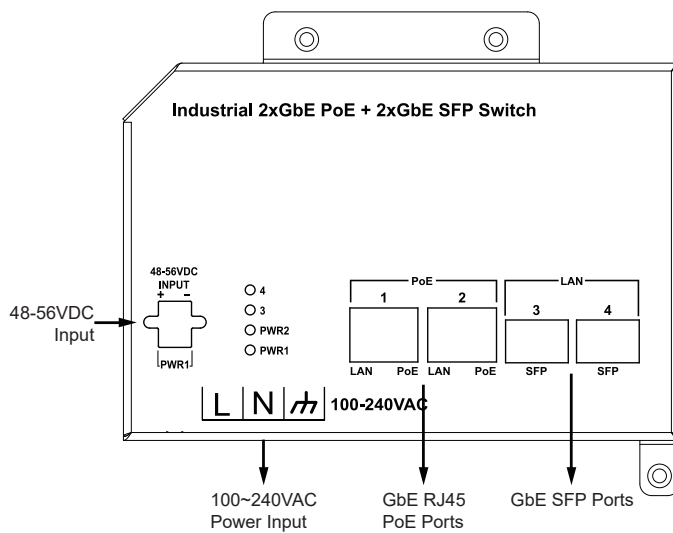


### AC Power Cable Spec.

Wire Size	10~18AWG
Wire Strip Length	8mm

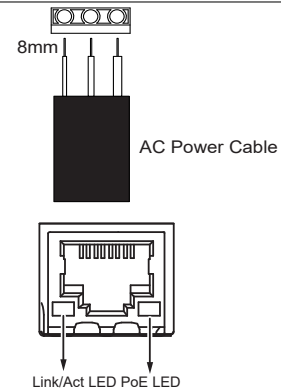


### H40-022-90-120-A / H40-022-91-120-A / H40-022-91-120-A-V2 only

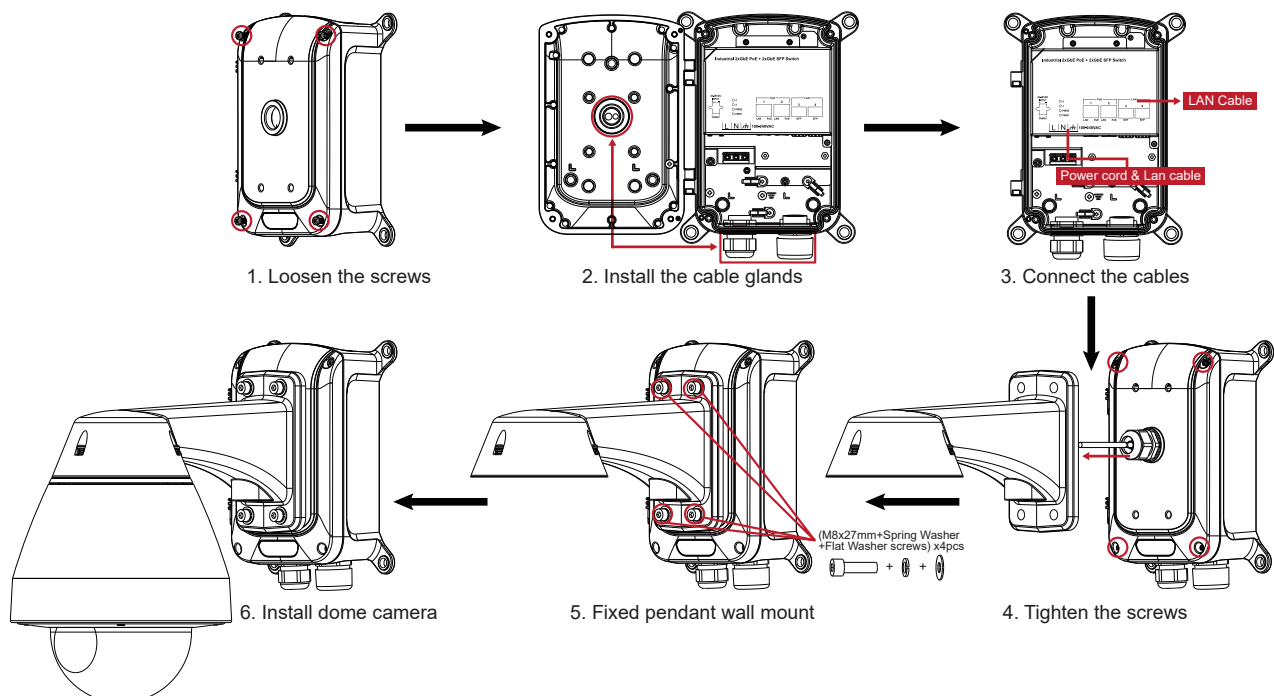


## IMPORTANT:

The cabinet must be grounded using a ground wire between the ground screw and earth ground.

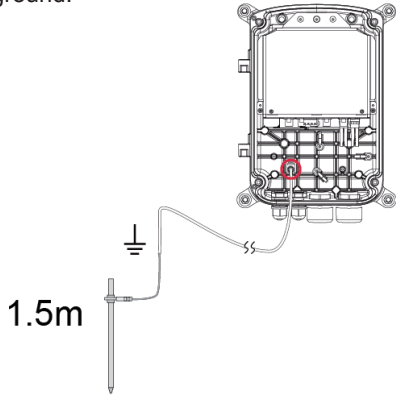

The mounting hole definition is illustrated below. The same mounting hole pattern apply to all pole-mount and corner-mount brackets.

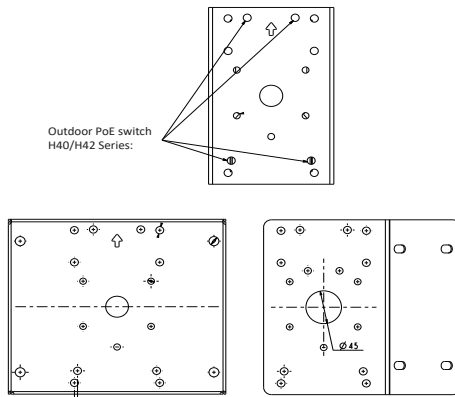


## LED DEFINITIONS



<b>Power PW1/PW2</b>	Green ON	Power is on and normal.
<b>SFP port Green</b>	Green ON	Fiber is aeeached.
	Green Flashing	Data is being transmitted / received.
<b>LAN ports Green</b>	Green ON	TX link is detected.
	Green Flashing	Data is being transmitted or received.
<b>PoE ports Amber</b>	Amber ON	PSE is activated and PD is detected.
	Amber OFF	PoE OFF

## INSTALLATION

Use the included M8 hex socket screws to secure the power box to a pole-mount or corner mount bracket.

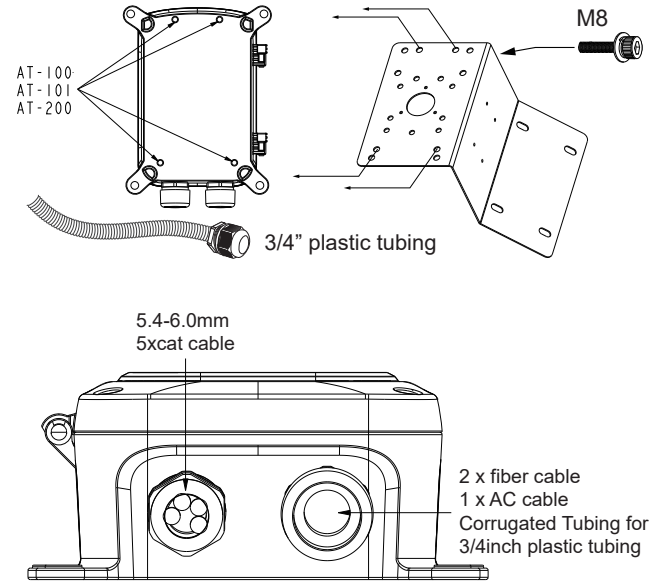


## ASSEMBLE CABLE GLANDS

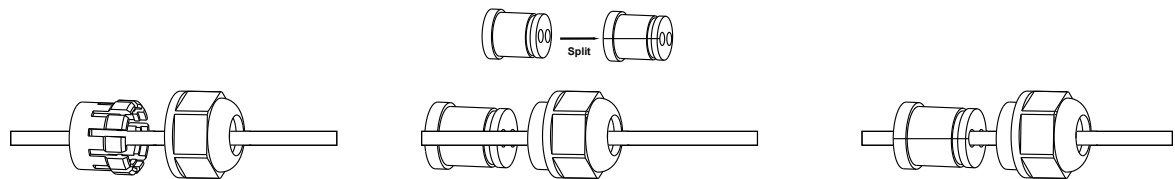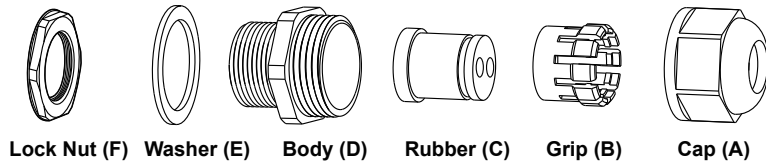


1. Thread the Cat5e/6 cable through the cap(A) & grip(B)

2. Split rubber(C), rubber have one sizes for meet 5.4~6mm Cat5e/6 cable.


3. Fit the split rubber(C) over the Cat5e/6 cable




4. Thread the Cat5e/6 cable through the body(D)




5. Assemble the washer to the body.



6. Mount the nut to the assemblage.

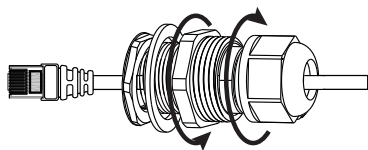

7. Tighten the cap and the body together as the illustration shows.



8. Tighten the whole assemblage to the full. See the illustration.

All specifications are subject to change without notice.  
Copyright © 2025 AETEK INC. All rights reserved.