
I63-216

Industrial 2-Port Gigabit PoE+ Injector, 12-48VDC Input




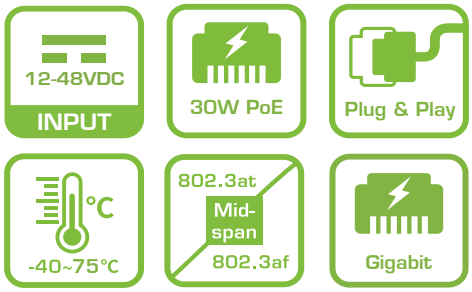


Features

- Provides 30W at PoE Power Feeding on 2-pairs
- 6KV PoE surge protection
- Remote power feeding up to 100m
- IEEE 802.3at/af compliant
- Automatic detection and protection of non–standard Ethernet terminals
- Supports 10/100/1000Base-T LAN environment
- Safe and reliable power to PoE cameras or WLAN access points
- Plug-and-Play installation

Applications

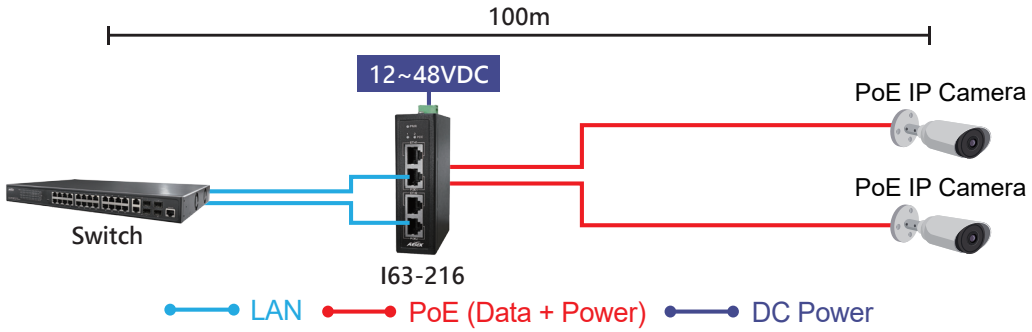

Dimensions

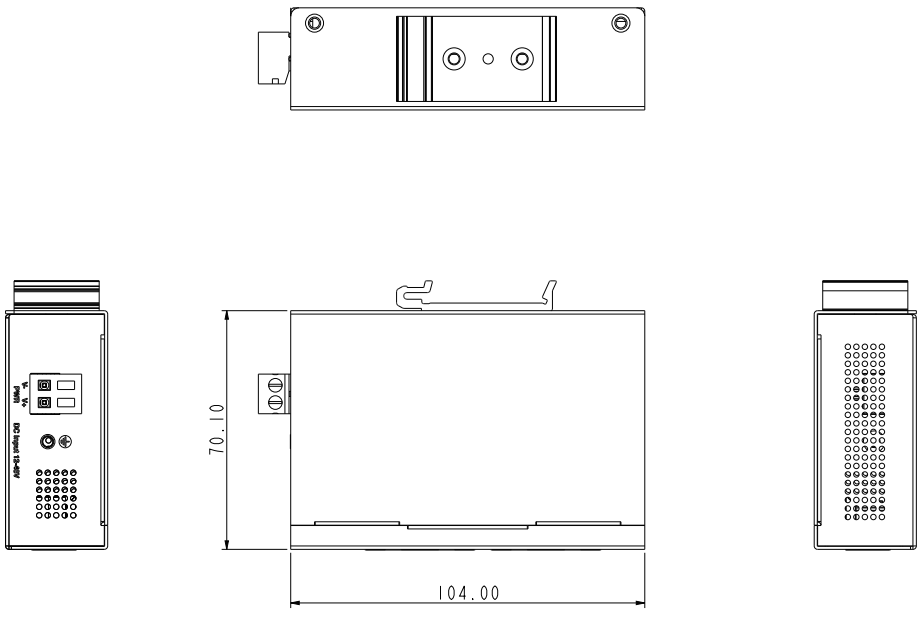

Technical Specifications

Networking Specifications	
Gigabit Ethernet 10/100/1000Mbps (RJ45)	2
IEEE 802.3at Power over Ethernet	Support
Power Specifications	
Input Voltage	12~48V DC
Output Power per Port	30W at PoE
Power Pin Assignment	45(+),78(-)
Surge Protection Data / PoE Port	6KV
Mechanical Specifications	
Dimensions (W x D x H)	30 x 70.1 x 104 mm
LED Indicators	Power, PoE
Weight	0.25 kg (0.56 lb)
Installation	Din-Rail
Environmental Specifications	
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Operating Humidity	10% to 90% non-condensing
Certifications	
EMC	CE, FCC, VCCI, C-Tick

All specifications are subject to change without notice. Copyright © AETEK INC. All rights reserved.
6F, No.192-1, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C. T: +886-2-82452822 E:sales@aetektec.com W: www.aetektec.com