
I69-206

Industrial Gigabit 95W PoH PoE Injector




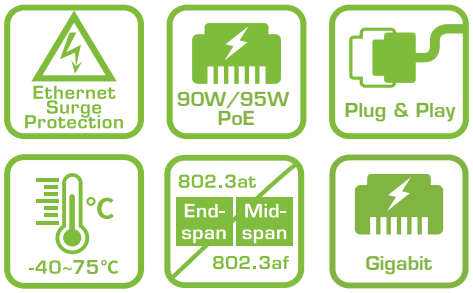

Features

- 12-56V DC Input
- Provides 95W PoH of PoE Power Feeding on 4-pairs
- 6KV PoE surge protection
- Remote power feeding up to 100m
- IEEE 802.3 bt/at/af compliant
- Automatic detection and protection of non–standard Ethernet terminals
- Supports 10/100/1000Base-T LAN environment
- Safe and reliable power to PoE cameras or WLAN access points
- Plug-and-Play installation

Applications

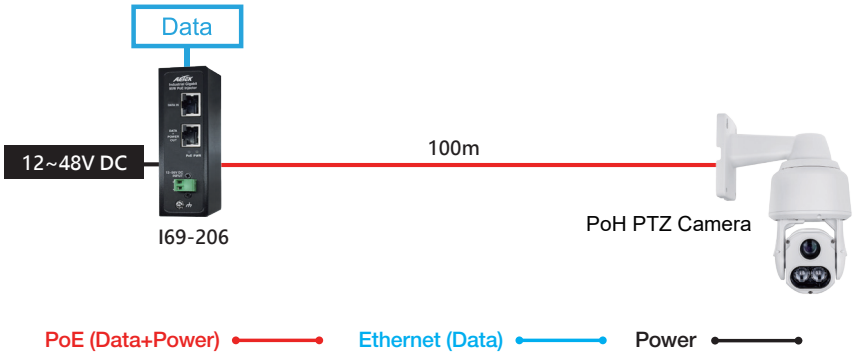

Technical Specifications

	I69-206
Networking Specifications	
Gigabit Ethernet 10/100/1000Mbps (RJ45)	1
IEEE 802.3at Power over Ethernet	Support
95W PoH	Support
Power Specifications	
Input Voltage	12~56V DC
Output Power	Max. 95W
Power Pin Assignment	1/2 (-), 3/6 (+); 4/5 (+), 7/8 (-)
Surge Protection Data / PoE Port	6KV

Technical Specifications

	I69-206
Mechanical Specifications	
Dimensions (L x W x H)	120 X 102 X 38.2 mm
LED Indicators	Power, PoE
Weight	0.3 kg (0.67 lb)
Installation	Din-Rail
Environmental Specifications	
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Operating Humidity	10% to 90% non-condensing
Certifications	
EMC	CE, FCC, VCCI, C-Tick
Surge	IEC/EN 61000-4-5 Ed.2014+A1:2017

Optional Accessories



NDR-120-48

Indoor Industrial Din-Rail Power Supply,
48~55V DC/120W,
-20°C ~ 70°C



DRL-48V120W1EN

Indoor Industrial Din-Rail Power Supply,
48V/120W,

Ordering Information

	**I69-206** • Industrial GbE 95W PoH PoE Injector • 12~56V DC Input

All specifications are subject to change without notice. Copyright © AETEK INC. All rights reserved.
6F, No.192-1, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C. T: +886-2-82452822 E:sales@aetektec.com W: www.aetektec.com