



# C50-082-30-130 Smart PoE Switch

# C50-162-30-250 Smart PoE Switch

# C50-242-30-370 Smart PoE Switch

## Quick Installation Guide

### INTRODUCTION

The C50 Series is a 8/16/24 port 10/100/1000BaseT Web smart PoE switch capable of feeding 15.4/30W (54V max. per port) power to Power over Ethernet (PoE) devices. It comes with 2x GbE SFP port. The switch is capable of a total of 130/250/370 Watts power budget.

### PACKAGE CONTENTS


* 1x PoE switch	* 1x Quick Installation Guide
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)

### ⚠ IMPORTANT:


1. Install the PoE switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables.
4. AC input (100~240V/AC, 50~60Hz), for a max. consumption of 150/300/430W.

### C50-242-30-370 CONNECTION

#### Front Panel

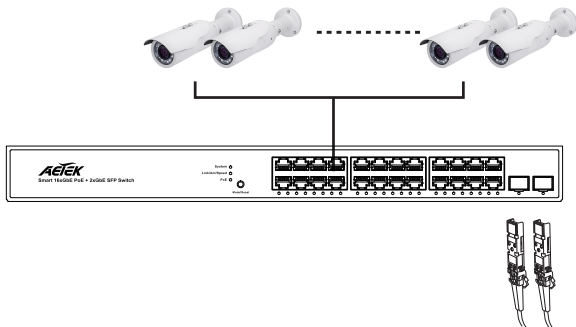


#### Rear Panel

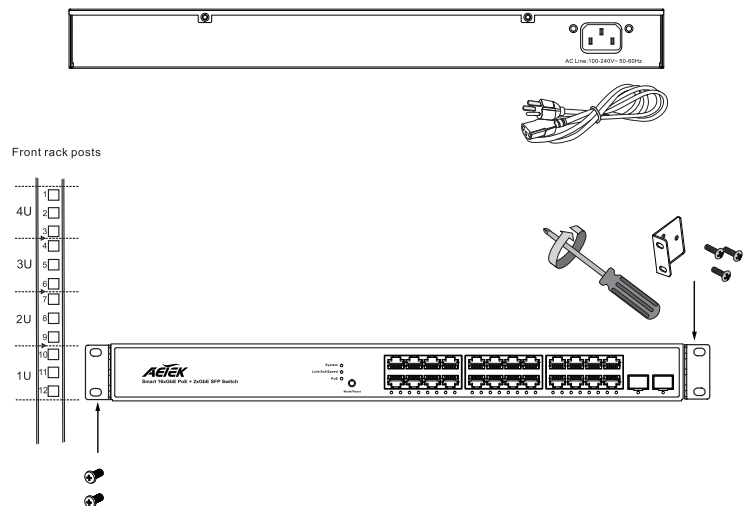


### C50-182-30-250 CONNECTION

#### Front Panel

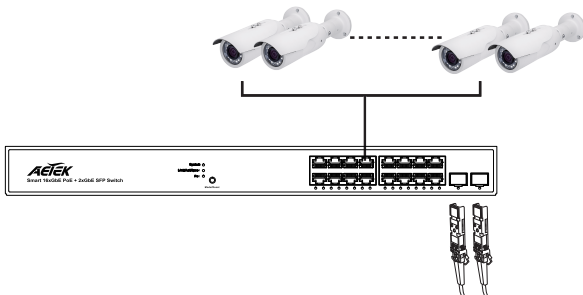


#### Rear Panel

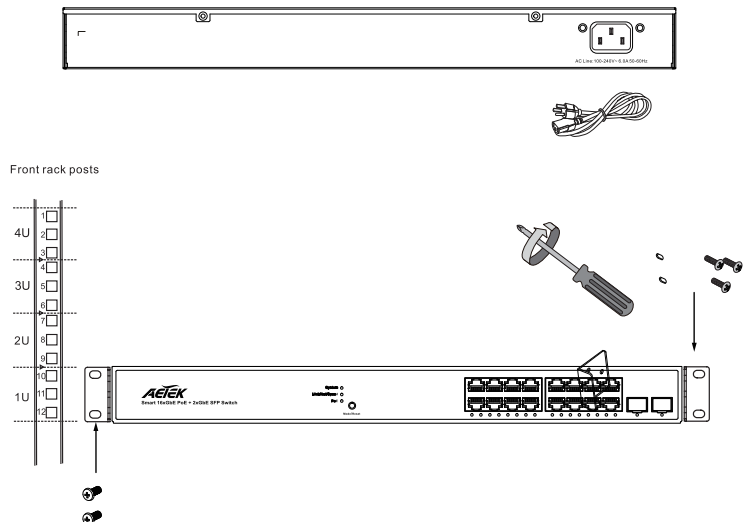


## C50-082-30-130 CONNECTION

### Front Panel

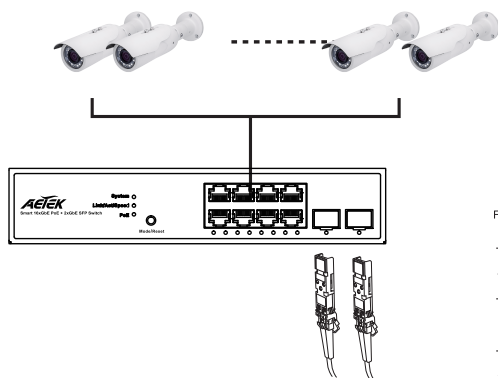

### Rear Panel

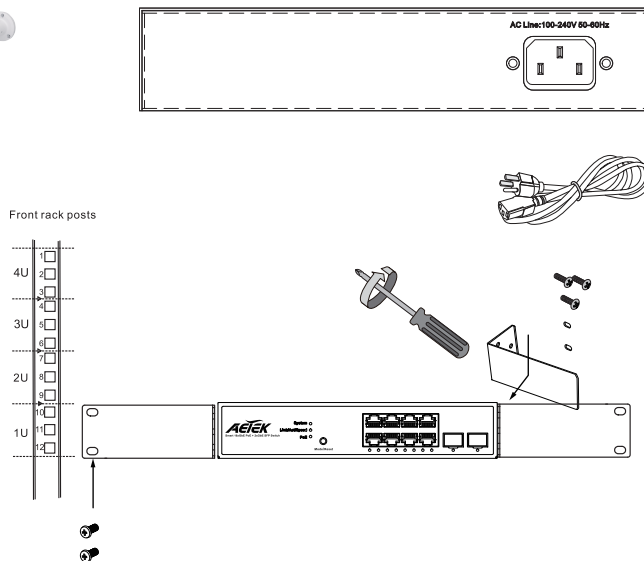

### DEFAULTS

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
User name	admin
Password	admin

### LED DEFINITIONS

System	Green ON	Power is on and normal.
	Green Off	The switch is not receiving power.
	Red ON	An abnormal state, such as exceeding operation temperature, has been detected in the switch.
Link/Act/Speed	Green ON	The port Status LEDs displaying link status, network activities, and speed on each port.
PoE	Green ON	The RJ45 port status LEDs display PoE powering statuses on each port.
RJ45 ports SFP ports	Green ON	Port is enabled and link established with a device at the 1000Mbps speed.
	Green Blinking	Port is transmitting and receiving data at the 1000Mbps speed.
	Amber ON	Port is enabled and link established with a device at the 100Mbps speed.
	Amber Blinking	Port is transmitting and receiving data at the 100Mbps speed.
PoE Mode RJ45 ports	Green ON	Port is enabled and supplying power to PD.
	Amber ON	An abnormal state detected, such as overload.

### Mode/Reset Button

Task	Press time	System LED Behavior	Port Status LED Behavior
Change LED Mode	0 ~ 2 seconds	Green ON	LED status will be changed according to the mode selected
Restart	2 ~ 7 seconds	Green blinking	All LEDs are off
Restore defaults	7 ~ 12 seconds	Green blinking	All LEDs stay ON