



# C51-082-30-130 L2 Smart PoE Switch

# C51-164-30-250 L2 Smart PoE Switch

# C51-244-30-370 L2 Smart PoE Switch

## Quick Installation Guide

### INTRODUCTION

The C51 Series is a 8/16/24 port 10/100/1000BaseT L2 Smart PoE Switch capable of feeding 15.4/30W (54V max. per port) power to Power over Ethernet (PoE) devices. It comes with 2x GbE SFP or 2xGbE RJ45 + 2xGbE SFP port. The switch is capable of a total of 130/250/370 Watts power budget.

### PACKAGE CONTENTS


* 1x PoE switch	* 1x Quick Installation Guide	* 1x Console Cable
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)	

### ⚠ IMPORTANT:


1. Install the PoE switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables.
4. C51-082-30-130 AC input (100~240V/AC, 50~60Hz, 3A)
5. C51-164-30-250 AC input (100~240V/AC, 50~60Hz, 3.29A)
6. C51-244-30-370 AC input (100~240V/AC, 50~60Hz, 4.97A)

### C51-244-30-370 CONNECTION

#### Front Panel

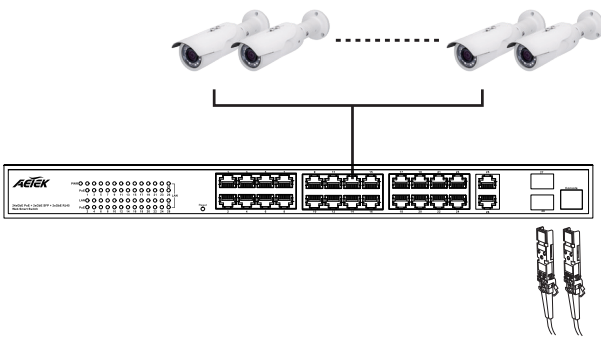


#### Rear Panel

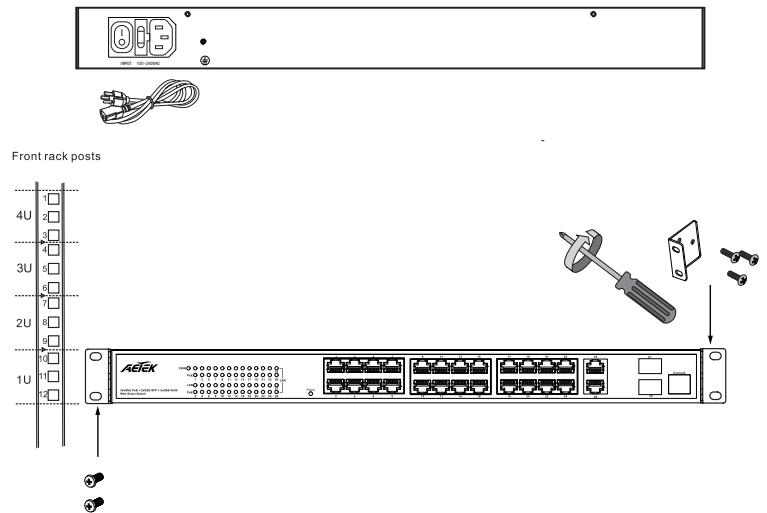


### C51-164-30-250 CONNECTION

#### Front Panel

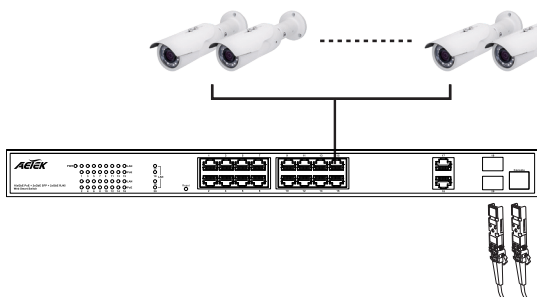


#### Rear Panel

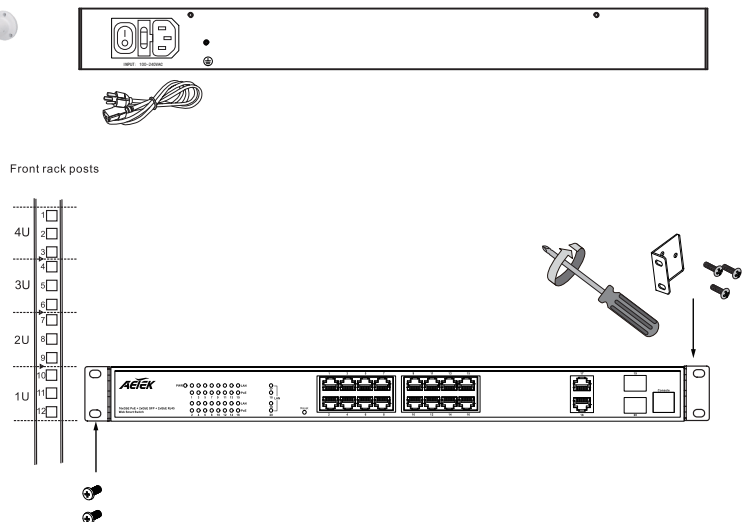


## C51-082-30-130 CONNECTION

### Front Panel

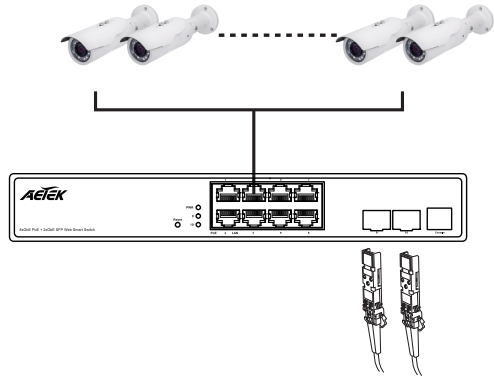

### Rear Panel

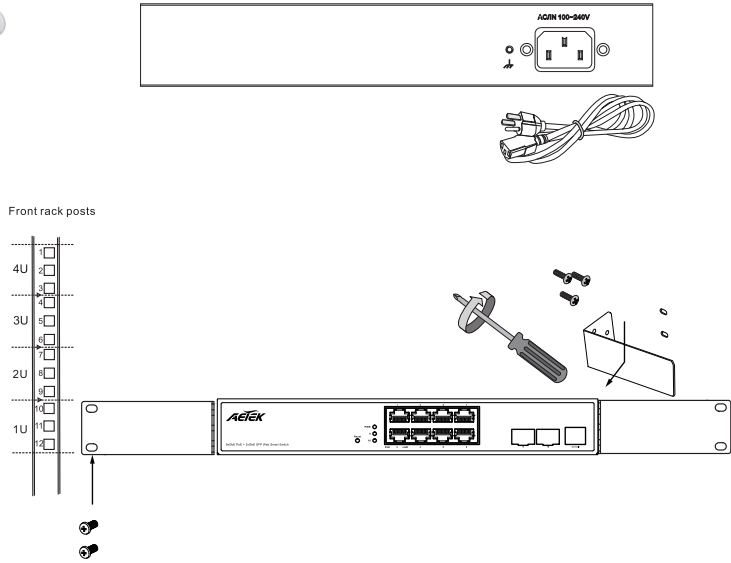

### DEFAULTS

<b>IP Address</b>	192.168.1.1
<b>Subnet Mask</b>	255.255.255.0
<b>User name</b>	admin
<b>Password</b>	admin

### LED DEFINITIONS

<b>Power</b>	Green ON	The Power LED lights up when the switch is connected to a power source.
<b>LAN</b>	Green ON	Port is enabled and link established with a device at the 1000Mbps speed.
	Green Blinking	Port is transmitting and receiving data at the 1000Mbps speed.
	Amber ON	Port is enabled and link established with a device at the 100Mbps speed.
<b>PoE</b>	Amber Blinking	Port is transmitting and receiving data at the 100Mbps speed.
	Green ON	Indicates the PoE powered device (PD) is connected and the port supplies power successfully.
	Light Off	Indicates no powered device (PD) connected.

### Reset Button

Task	Press time	Port Status LED Behavior
Restart	2 ~ 7 seconds	All LEDs are OFF
Restore default	7 ~ 12 seconds	All LEDs stay ON

All specifications are subject to change without notice.  
Copyright © 2020 AETEK INC. All rights reserved.