



C70-00F-02 L2+ PRO Managed Switch

Quick Installation Guide

INTRODUCTION

The C70-00F-02 provides 24 GbE SFP ports, 4 GbE/10G SFP+ ports, and a RJ45 console. Offering a full suite of L2 features, 10GbE uplinks, and advanced L3 features such as static route, the C70-00F-02 comes with abundant bandwidth to serve as a backbone for your business network. The switch is especially applicable being strung between switches, or connecting to high-speed server that need to stream videos from dozens or hundreds of cameras.

PACKAGE CONTENTS


* 1x Quick Installation Guide	* 1x L2+ Switch	* 4x Rubber Feet
* 2x Power Cord (Type by the shipped-to area)	* 2x Rack Mount Ears	* 1x RS232 Cable
* 1x SFP-TX-01 SFP to RJ45 Module		

⚠ IMPORTANT:

1. Install the switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables. Use 50/125 or 62.5/125 micron multimode or 9/125 micron single-mode fiber transceivers and fiber optic cables.
4. Dual AC input : 100~240V/AC, 50~60Hz, redundant power Supply.

CONNECTION

Front Panel

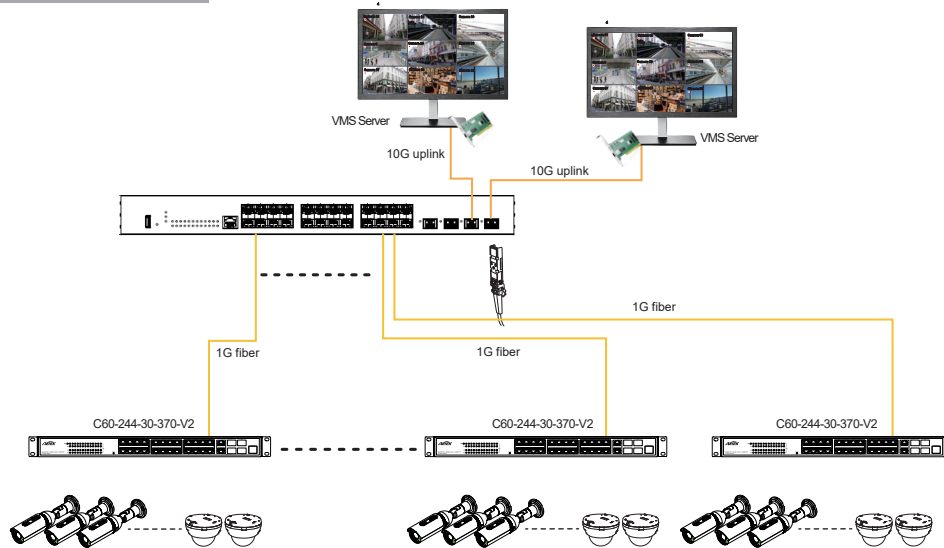

DEFAULTS

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.254
User name	admin
Password	admin

Baud rate	115200
Stop bits	1
Data bits	8
Parity	N
Flow contro	none

LED DEFINITIONS

PWR-1	Green	Lit when power is on.
PWR-2	Green	Lit when power is on.
SYS	Green	Blinking when system is booting. Lit when system is coming up.
ALM	Red	Always off; until any message about system errors turns the light on.

Below are the LEDs for the SFP and SFP+ ports:

SFP	P1-P24 SFP Link/ Act/Speed	Green	Green when SFP link is on 100/1000Mbps.
SFP+	P25-P28 SFP+ Link/ Act/Speed	Blue / Green	Green when SFP+ link is on 1000Mbps. Blue when SFP+ link on 10Gbps, blinks when any traffic is present.

Mode/Reset Button

Task	Press time	System LED Behavior	Port Status LED Behavior
Restart	2 ~ 7 seconds	Green blinking	All LEDs are off
Restore defaults	7 ~ 12 seconds	Green blinking	All LEDs stay ON

All specifications are subject to change without notice. Copyright © 2026 AETEK INC. All rights reserved.