



# C60-00F-01 L2 Managed Switch

## C60-00B-01 Quick Installation Guide

### INTRODUCTION

The C60 series provides 24xGbE RJ45 ports + 4x1G/10G SFP+ ports or 12x1G/10G SFP+ ports, and a RJ45 console. Offering a full suite of L2 features, 10GbE uplinks, the C60 series comes with abundant bandwidth to serve as a backbone for your business network. The switch is especially applicable being strung between switches, or connecting to high-speed server that need to stream videos from dozens or hundreds of cameras.

### PACKAGE CONTENTS


* 1x Switch	* 1x Quick Installation Guide	* 4x rubber feet
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)	* 1x RS232 console cable

### ⚠ IMPORTANT:


1. Install the Switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables. Use 50/125 or 62.5/125 micron multimode or 9/125 micron single-mode fiber transceivers and fiber optic cables.
4. AC input (100~240V/AC, 50~60Hz)

### C60 Series CONNECTION

#### C60-00F-01 CONNECTION

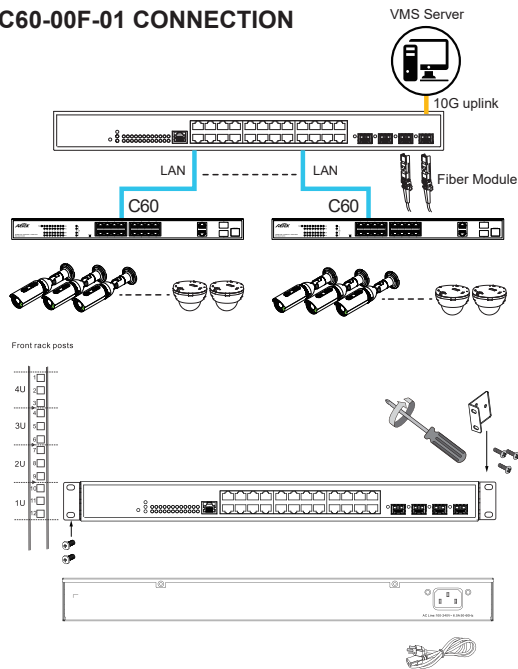

#### C60-00B-01 CONNECTION

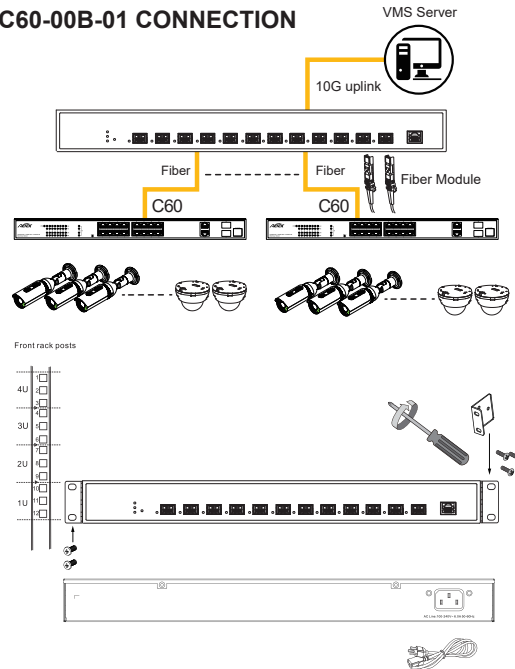

### DEFAULTS

<b>IP Address</b>	192.168.1.1	<b>Baud rate</b>	115200
<b>Subnet Mask</b>	255.255.255.0	<b>Stop bits</b>	1
<b>User name</b>	admin	<b>Data bits</b>	8
<b>Password</b>	admin	<b>Parity</b>	N
		<b>Flow Control</b>	none

### Mode/Reset Button

Task	Press time	Port Status LED Behavior
Restart	2 ~ 7 seconds	All LEDs are off
Restore defaults	7 ~ 12 seconds	All LEDs stay ON

### LED DEFINITIONS

<b>PWR</b>	Green	Lit when power is on
<b>SYS</b>	Green ON	Blinking when system is booting. Lit when system is coming up.
<b>ALARM</b>	Red	Always off; until any message about system errors turns the light on.
Below are the LEDs for the Ethernet and SFP+ ports:		
<b>Ethernet port LED</b>	P1-P24 TP Link/Act/Speed	Green / Amber Green when TP link is on 1000Mbps Amber when TP link is on 10/100Mbps, blinks when any traffic is present.
<b>SFP+</b>	P25-P28 Link/Act/Speed	Blue / Green Blinks when any traffic is present. The light is blue when linking up 10Gbps. The light is green when linking up 1Gbps.

All specifications are subject to change without notice.  
Copyright © 2026 AETEK INC. All rights reserved.