


I69-200


Industrial Gigabit 95W PoH PoE Injector

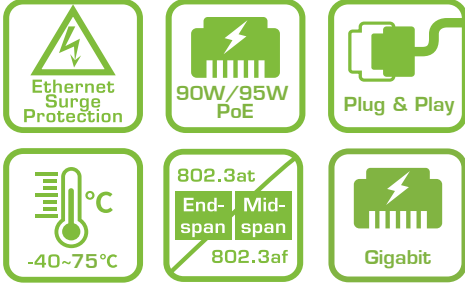

Features

- Provides 95W PoH of PoE Power Feeding on 4-pairs
- 6KV PoE surge protection
- Remote power feeding up to 100m
- IEEE 802.3 at/af compliant
- Automatic detection and protection of non-standard Ethernet terminals
- Supports 10/100/1000Base-T LAN environment
- Safe and reliable power to PoE cameras or WLAN access points
- Plug-and-Play installation

Applications

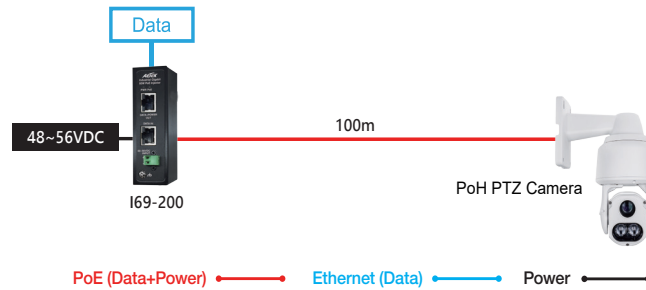


Technical Specifications

	I69-200
Networking Specifications	
Gigabit Ethernet 10/100/1000Mbps (RJ45)	1
IEEE 802.3at Power over Ethernet	Support
95W PoH	Support
90W IEEE 802.3bt Power over Ethernet	-
Power Specifications	
Input Voltage	48~56VDC
Output Power	Max. 95W
Power Pin Assignment	1/2 (-), 3/6 (+); 4/5 (+), 7/8 (-)
Surge Protection Data / PoE Port	6KV
Mechanical Specifications	
Dimensions (L x W x H)	100 X 81.5 X 30 mm
LED Indicators	Power, PoE
Weight	0.2 kg (0.44 lb)
Installation	Din-Rail


Technical Specifications

	I69-200
Environmental Specifications	
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Operating Humidity	10% to 90% non-condensing
Certifications	
EMC	CE, FCC, VCCI, C-Tick
Surge	IEC/EN 61000-4-5 Ed.2014+A1:2017

Optional Accessories



NDR-120-48
Indoor Industrial Din-Rail Power Supply,
48~55VDC/120W,
-20°C ~ 70°C



DRL-48V120W1EN
Indoor Industrial Din-Rail Power Supply,
48V/120W,

Ordering Information



I69-200

- Industrial GbE 95W PoH PoE Injector
- 48~56VDC Input